


## Prozessfiltration Sintermetalleinsätze

### Daten

<b>Temperaturbereich</b>	-50°C / +200°C
<b>Feinheit</b>	1µm, 5µm und 25µm
<b>Material</b>	Edelstahl 1.4301
<b>Verbindung der Teile</b>	Lasergeschweißt ohne Zusatz*

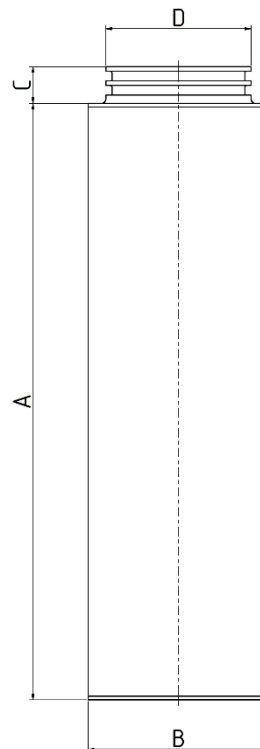

Weitere Anschlüsse nach Kundenspezifikation.

Filtereinsatz	03/10	04/10	05/20	05/30	07/30	10/30	15/30	20/30	30/30	30/50
<b>A</b>	76	104	128	128	180	254	381	510	764	764
<b>B</b>	Ø34	Ø54	Ø54	Ø76	Ø76	Ø76	Ø76	Ø76	Ø76	Ø130
<b>C</b>	10,5	13,5	13,5	15,5	15,5	15,5	15,5	15,5	15,5	15,5
<b>D</b>	Ø30,2	Ø37,1	Ø37,1	Ø61	Ø61	Ø61	Ø61	Ø61	Ø61	Ø89

\*

